

Control Panel Heater


Type PXFT

Application

The PXFT heater is designed to maintain a suitable temperature inside enclosure and spaces.

All heaters have a built-in thermostat. The heater is also available without thermostat on special order.

VIEW WITHOUT GUARD

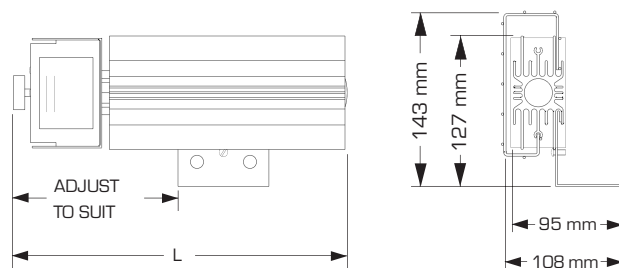

GUARD OPTIONAL ON SOME UNITS



Description

The PXFT uses a high surface area aluminum heat emitter to eliminate the need for a fan while providing low radiation and high convection heating to the enclosure. The thermostat is adjustable from 0 to 50°C. A special bracket allows the heater to be floor or wall mounted with the terminal box located on the left or right side, top or bottom. Wire guards are provided standard with the PXFT heater.

Available Options

- Special voltage
- Special wattage
- Explosion proof terminal housings
- Built-in thermal cut-out
- Special lengths
- Special flange or screwplug sizes
- Extra conduit fittings

Installation

The PXFT heater is approved for horizontal or vertical mounting on the floor or lower wall of the enclosure. Heaters must be installed using the mounting bracket provided to ensure minimum spacing between the heater and the wall or floor.

TABLE 2 - Type PXFT Control Panel Heater

WATTS	STANDARD VOLTAGES	LENGTH L MM	PART NUMBER	NET WT. KG
300	240	381	PXFT300	1.6
400	240	553	PXFT400	2.5
600	240	724	PXFT600	3.4